



IMAGETEAM[™] 3900i Kit Series

USB Interface Fixed Position Linear Imager

in Apple[®] iMac[™] Colors

Hand Held Products offers multiple color scanners to complement the Apple[®] iMac[™]. The IMAGETEAM[™](IT) 3900i is a fixed position linear imager that adds bar code scanning to kiosks and other OEM applications. The IT3900i uses linear imaging technology to deliver a bright, sharp aiming line, and fast reading and decoding that makes scanning intuitive and simple.

Bar code scanning at a kiosk is typically done by someone without scanning experience. The scan line must be easy to see. The scanner must read quickly, without perfect orientation, and read a wide variety of bar code labels. Since the bar code is presented to the scanner, the scanner must have a large working range. The IT3900i does all this and more. The IT3900i has an automatic trigger mode for constant scanning, or can be used in a presentation mode, where the scanner turns on when a bar code is placed in its viewing area. Scanning can also be controlled by the host computer via serial commands.

The IT3900i connects to the Apple iMac via the USB port. The IT3900i comes in two kit versions: the 3900i-12F in frost, and the blueberry 3900i-12B. Kits include a USB cable.

Features & Benefits

Translucent Plastic Housing

Complements iMac computers and provides a sharp, modern look.

USB Interface

Compatible with iMac and other USB compliant PCs.

Bright, Sharp and Focused Aiming Line

Easy scanning by inexperienced users in any lighting condition.

100,000 Mean Time Between Failures and 5 Year Warranty

Long, reliable in-service life.

Powerful, Flexible Architecture

Connects and interfaces to all major PCs and Apple[®] computers. Windows[®]-based programming tools provided for easy setup and configuration.

Real World Reading Performance

Reads faded labels, short quiet zones, dot matrix printing, and printer-induced bar space variations.

Performance

Illumination:	630 NM Visible Red LED
Receiving Device:	3648 element linear imager
Reading Distance:	From 1 in. (2.5 cm) to 9 in. (22.8 cm) on medium density codes
Reading Width:	5 in. (12.7 cm) code width at 7 in. (17.8 cm) distance
Resolution:	5 mil. at 3.5 in. (8.8 cm) distance
Skew Angle:	±30°
Pitch Angle:	±15°
Horizontal Velocity:	2 in. (5.1 cm) per second
Minimum Reflectance	
Difference:	30%
Scan Rate:	Programmable to 270 scans per second
Decode Rate:	270 decodes per second

Mechanical/Electrical

Dimensions

Length:	4.7 in. (11.9 cm)
Height	1.5 in. (3.8 cm)
Width:	3.1 in. (7.9 cm)
Weight:	
Housing:	Polycarbonate/ABS blend, UL 940VO
Power Requirements:	5Vdc ± 10% at scanner

Current Draw:	<u>Scanning</u>	<u>Standby</u>
@270 s/s	275mA	125mA
@67 s/s	150mA	125mA

Power Supply

Noise Rejection:	Maximum 100mV peak to peak, 10 to 100 kHz
Triggering:	Continuous autotrigger mode, or via serial command
Mounting:	Three M-4 threaded inserts

Environmental


Temperature	
Operating:	+32°F to +122°F (0°C to +50°C)
Storage:	-40°F to 140°F (-36°C to +60°C)
Humidity:	0 to 95%
Mechanical Shock:	Operational after 25 drops from 5 ft. (1.53 m) to concrete
Ambient Illumination:	0 - 100,000 lux
ESD Protection:	Functional after 15kV discharge
Vibration:	Withstands 5G peak from 20 to 300 Hz
Agency:	FCC Class B, CE EMC Class B, CE Low Voltage Directive, EN60825-1 LED Safety: Class 1, UL, cUL listed, TÜV
MTBF:	per MIL-HDBK-217F Ground Benign exceeds 100,000 hours
Symbologies:	Codabar, Code 3 of 9 including PARAF, Interleaved 2 of 5, Code 2 of 5, Matrix 2 of 5, Code 11, Code 128, UPC, EAN/JAN, China Postal Code.
Interfaces:	All popular PCs and terminals via keyboard wedge, keyboard replacement/direct connect, Apple ADB, iMac, USB, TTL level RS-232, wand emulation mode, and includes (HHLC) non decoded laser compatible output.
Warranty:	Five year factory warranty.

IMAGETEAM is a registered trademark of Welch Allyn Data Collection, Inc.

iMac is a trademark of Apple Computer, Inc.

Apple is a registered trademark of Apple Computer, Inc.

Windows is a registered trademark of Microsoft, Inc.

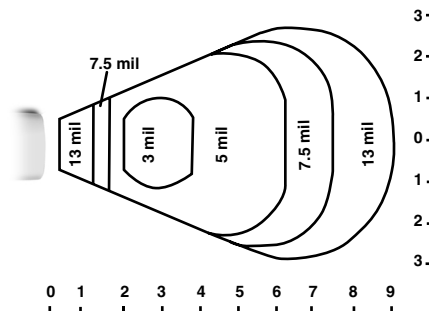

Typical reading zones on good quality bar codes

Switzerland • OPAL Associates AG • Motorenstrasse 116 • CH-8620 Wetzikon • Telefon +41 (0)1 931 12 22 • Telefax +41 (0)1 931 12 20 • Email info@opal.ch • OPAL Associates SA • Avenue des Boveresses 54 • Case postale 29 • CH 1000 Lausanne 21 • Telefon +41 (0)21 653 95 00 • Telefax +41 (0)21 653 95 02 • Email info@opalsa.ch • Germany • OPAL Associates GmbH • Löhnerhof-Str. 2 • D-78467 Konstanz • Telefon +49 (0)7531 813 000 • Telefax +49 (0)7531 813 00 99 • Email info@opalgmbh.de • OPAL Associates GmbH • Osterholder Allee 2 • 25421 Pinneberg • Telefon +49 (0)4101 787 615 • Telefax +49(0)4101 787 616 • Email hamburg@opalgmbh.de • Austria • OPAL Associates GesmbH • Vorarlberger Wirtschaftspark • A-6840 Götzis • Telefon +43 (0) 5523 58833 • Telefax +43 (0)5523 521569 • Email info@opalgmbh.at

